

# LED SWIVEL LIGHT


SMALL PACKAGE. MAJOR OUTPUT

**PRETORIA**

A Safe Fleet Brand



**BEFORE**

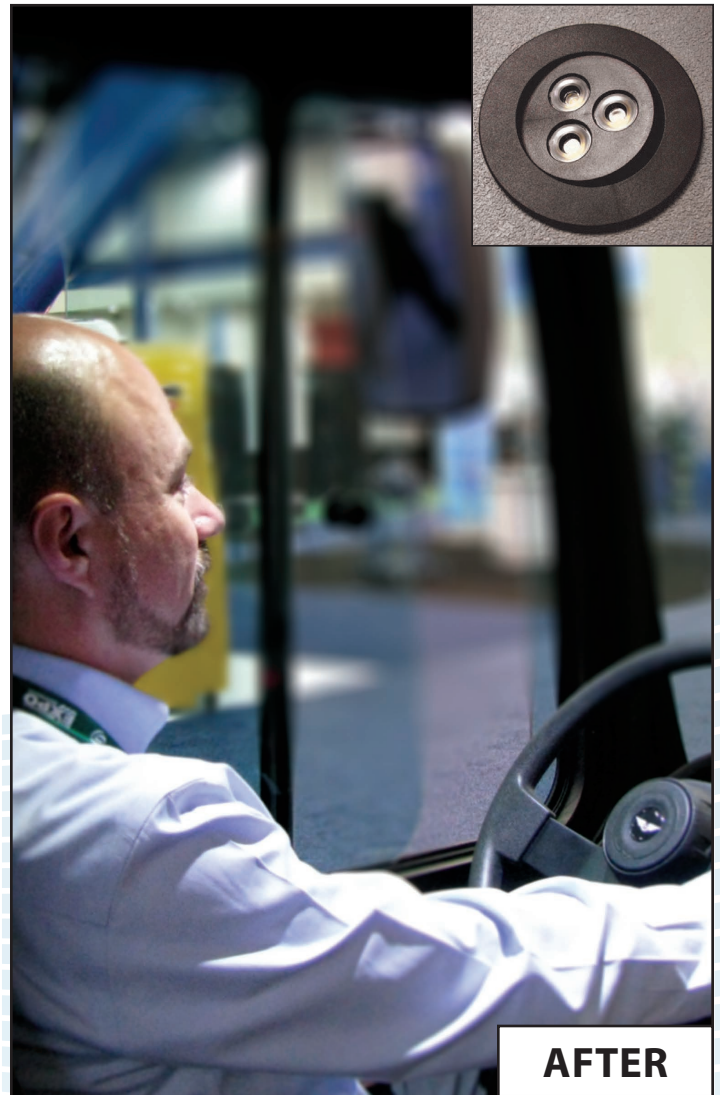

**AFTER**



**LED DRIVERS LIGHT**  
Fixture swivels or locks into a set position and provides light exactly where needed



**OPTIONS**  
Available in two LED colors: Cool White (replicates daylight), or Warm White (replicates fluorescent lamps). Also available with Black or Gray trim ring. Special color temperatures also available



**EXTREME TEMP**  
Certified operation between -40°C and 55°C



**WARRANTY**  
5 year



**VOLTAGE**  
Stocked in 12 and 24 VDC with many other input voltages available

- **Low Profile / 1.6" Overall Depth**
- **With or Without Specified Connector**
- **Limited Five-Year Warranty**

## LED SWIVEL LIGHT SPECIFICATIONS

Input Voltage, Nominal	12 VDC	24 VDC
Input Voltage, Range	11.5 – 18 VDC	19 – 32 VDC
Maximum input current	340 mA @ 11.5V	210 mA @ 19V
Switching frequency	67-125 kHz	
Operating temperature range	-40° C to +55° C	
Cooling	Conduction to heat sinking surface and natural air convection	
Circuit Protection	Input reverse polarity Transient protection	
Environmental protection	Conformal coating protects against moisture, dust, etc	
Light Source	3 - 1.0 W LED's	
Light Output	Minimum of 80 lm / per LED	
Light Color	Nominal 5500K (Cool White) Nominal 3000K (Warm White)	
Lens Angles	Frosted 45° Lens - Wide Beam Frosted 25° Lens - Narrow Beam	
Mechanical Features	30° swivel head with factory or service shop lock feature	
Housing Color	Black (Standard) or Gray (Optional)	

