

# LED STRIP LIGHTS

SEE, STEP, AND REACH WITH CONFIDENCE



A Safe Fleet Brand



#### ADAPTABLE

Used as an emergency lighting fixture, at articulated joints, vestibules, or as egress lighting



#### EXTREME TEMP

Certified operation between -30° and 130°



#### DIMMABLE

(5) dimming settings help reduce eye strain = 10%, 20%, 40%, 60% or 80%



#### BATTERY

Available as 12V or 24V and features reverse polarity and transient protection to ensure fixture longevity



#### OPTIONS

Available as a surface mount, or flush mount (no visible fasteners), with or without connector, and as warm white (4500K), or cool white (6500K)



#### IMPACT AND SCRATCH RESISTANT

Durable aluminum construction and polycarbonate lens are impact and scratch resistant for enhanced life



#### WARRANTY


5 year

- Available in Standard and Custom Lengths
- Installs with No Visible Fasteners


## LED STRIP LIGHT SPECIFICATIONS

Input Voltage, Nominal	12 VDC	24 VDC
Input Voltage, Range	11.5 – 18 VDC	19 – 32 VDC
Frequency	67-125 kHz	
Operating temperature range	-40° C to +55° C	
Circuit Protection	Input reverse polarity Transient protection	
Environmental protection	Conformal coating protects against moisture, dust, etc	
Light Source	0.1 Watt LED's—Double Row	
Light Output	Minimum of 400 Lumens per foot	
Light Color	Nominal 6500K (Cool White) Nominal 4500K (Warm White)	
Lens Color	Frosted White	
Housing Color	Satin Anodized Aluminum	
End Cap Color	Gray	

**Flush Mount**

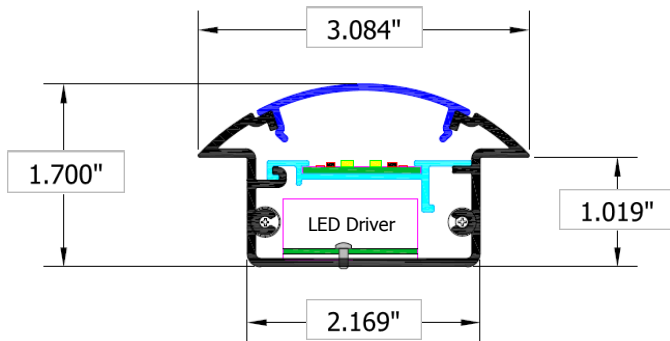

**Surface Mount**

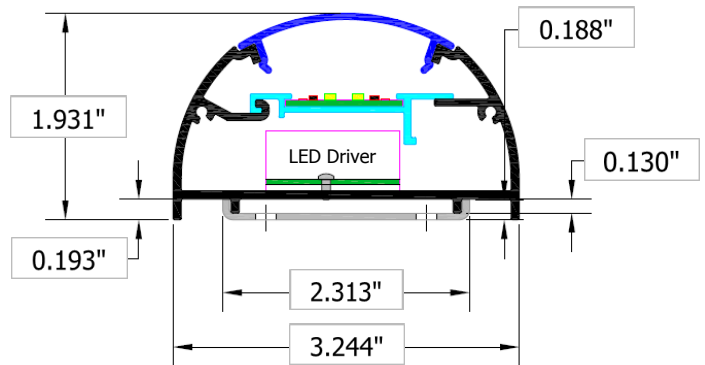

**Surface Mount**

NOMINAL LENGTH	ACTUAL LENGTH	LENS LENGTH	12V AMP	24V AMP	NOMINAL OPENING WIDTH	NOMINAL OPENING LENGTH
2'	28.25"	25"	0.77	0.39	NA	NA
3'	40.25"	37"	0.95	0.49	NA	NA
4'	52.25"	49"	1.26	0.63	NA	NA
5'	64.25"	61"	1.56	0.77	NA	NA
6'	76.25"	73"	1.97	0.97	NA	NA

**Flush Mount**

NOMINAL LENGTH	ACTUAL LENGTH	LENS LENGTH	12V AMP	24V AMP	NOMINAL OPENING WIDTH	NOMINAL OPENING LENGTH
2'	26.62"	25"	0.77	0.39	2.31"	24.31"
3'	38.62"	37"	0.95	0.49	2.31"	36.31"
4'	50.62"	49"	1.26	0.63	2.31"	48.31"
5'	62.62"	61"	1.56	0.77	2.31"	60.31"
6'	74.62"	73"	1.97	0.97	2.31"	72.31"