## **Rugged Public Display Monitor**


## 15.6" High Definition Industrial grade Color LCD Monitor

15.6" High Definition Industrial grade Color LCD Monitor with LED backlighting and Shock and Vibration treatment.

- 1366 x 768 (WXGA) resolution
- HDMI, VGA and BNC inputs provide support for cameras, media players and DVRs/NVRs
- LED backlights
- Shock and vibration treatment
- Powder coated steel enclosure
- Replaceable acrylic cover to added monitor protection



Specifications	
Resolution	1366 x 768 (WXGA)
Viewable Area	13.55" (W) x 7.62" (H) (344.23 x 193.53mm)
Pixel Pitch	0.252mm
Display colors	16.2M
Aspect Ratio	16:9
Brightness	400 nits
Contrast Ratio	500:1
Viewing angle	170° (H) x 160°(V)
Response Time	8 ms Trf
Control	OSD via Rear Panel push buttons
Lockable Rear Panel buttons	Yes
Auto Restart after Power loss	Yes
Video Connectors	HDMI, VGA, Composite NTSC (Loop-Through)
Power Requirement	9 - 36V
Power Consumption	25W
Enclosure	Anti-Reflective Coating, Steel Enclosure
Mounting	100 x 100 Rear Vesa Mount Holes
Operating Temp	+32F to +140F (0 to 60°C)
Storage Temp	-4°F to +140°F (-20°C to +60°C)
Humidity	5 to 90%RH
Dimensions	15" (W) x 10.2" (H) x2" (D) (381 x 259.08 x 50.8mm)
Weight	6.60 lbs (2.99 kgs)
Rating	IP41

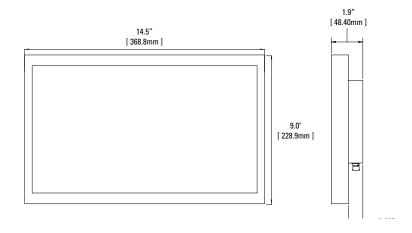

Ordering Information	
MVQ-TV156-KIT	LCD Monitor, 15.6", 1366x768, 400nits, 25W, 9-36V DC, w/Cover, Wall-Mounting Bracket, 5' VGA cable and 6' HDMI cable
MVQ-TV156-COVR	Spare Cover, MVQ-TV156 15.6" LCD Monitor

## 1088-15-PDM-SS-ST-011822

Copyright ©2019 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

