

# Blind Spot Sensors



## Advanced Blind Spot Sensor System

### CXS-129

The CXS-129 uses microwave sensor technology and has a quick, easy, and simple installation. The rugged, waterproof microwave sensors are surface mounted near the front of the vehicle. This commercial-grade system alerts the driver to obstacles up to 82ft away. While there will always be visual alerts, audio warnings will only trigger if the turn signals are on.



#### EASY INSTALLATION

The CXS-129 is easily surface mounted externally to the side of your vehicle.

#### VISUAL + AURAL ALERTS


Button mounts in A-pillar and lights up when object/vehicle is detected. The speaker sets off alert when object/vehicle is detected.

#### COMMERCIAL GRADE

These commercial grade sensors are waterproof with an IP67 rating.

Sensor Specs	
Operating Frequency	24.0-24.25GHz
Transmitting Power	15dBm
Detection Angle	40°
Speed Range	0.35mph - 137mph
Motion Detection	0-82ft
Operating Voltage	9-32V
Rated Current	<200mA
Working Temperature	-40°C ~ +80°C
Waterproof Rating	IP67

Sensor Placement Diagram

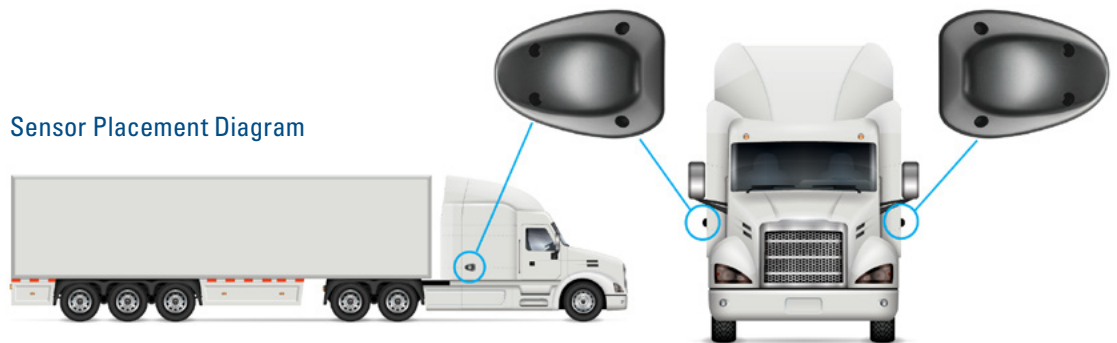

Copyright ©2019 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.



Rear View Safety, 1797 Atlantic Ave., Brooklyn NY 11233  
800.764.1028 sales@rearviewsafety.com  
www.rearviewsafety.com



SAFE FLEET  
Driving Safety Forward™