

# 9" SD or AHD Quad Driver Assist Monitor

Increase driver awareness and safety

This high resolution monitor ensures drivers see clear images from all camera inputs for optimum security and driver confidence.


This 9" Driver Assist Monitor supports up to four camera inputs and displays either a configurable default view or specific views based on triggers. Camera view sequence, trigger sources, day/night settings and picture adjustments can be made as necessary. The monitor supports either standard definition analog or 720p AHD cameras, but not a mix of both. Camera resolution is configured at the time of installation.



## Fully Scalable with the Safe Fleet Video Management Solution

- Advanced OSD menu for easy use
- Supports single/dual/triple/quad screen display views
- Three trigger inputs
- Auto day and night brightness control via an ambient light sensor
- Video camera connector is a 4-Pin GX12-4 screw aviation connector

## Monitor Display View Options:

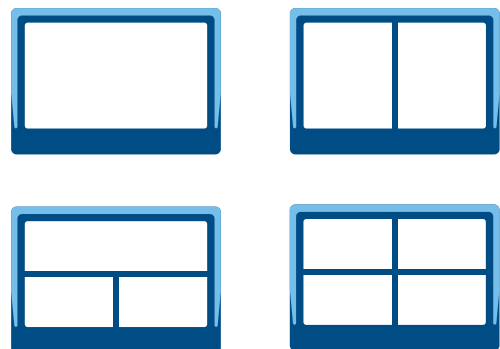

# 9" SD or AHD Quad Driver Assist Monitor

Increase driver awareness and safety

<b>Monitor PN</b>	WR9M4C
<b>Specifications</b>	
<b>Viewing Angle</b>	U:50° /D:60° /R:70°
<b>Response Time</b>	30 ms
<b>Menu Access</b>	OSD via from front panel push buttons
<b>Resolution</b>	1024 x 600 x 3 (RGB)
<b>Contrast ratio</b>	500:1
<b>Display Format</b>	16:9/500:1
<b>Display Brightness</b>	500 cd/m2, 400 nits
<b>Screen size</b>	9 inch (diagonal)
<b>Camera Connectors</b>	4 round 4 pin GX12 connectors (support for Standard Definition Analog compliant video signals or 720p Analog High Definition)
<b>Inputs</b>	3 triggers for rear view, left view, and right view
<b>Audio</b>	Built-in Speaker
<b>Mounting</b>	Use included U-Bracket Mount
<b>Monitor Weight (excludes cabling, bracket)</b>	1.4 lbs (0.6 kg)
<b>Power</b>	
<b>Input Power</b>	DC 10 V - 32 V
<b>Power Consumption</b>	6 W
<b>Environmental</b>	
<b>Operating temperature</b>	-4°F ~ 158°F (-20°C ~ +70°C)
<b>Impact rating</b>	5G
<b>Ordering Information</b>	
<b>WR9M4C</b>	9" LCD Quad View Monitor with 4 SDA or 4 720P AHD Video Inputs, Automatic Switching with Three Trigger Inputs



1312-9-INCH-SD-AHD-QUAD-ASSIST-MONITOR-SS-WR-030226

Copyright ©2026 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366  
safefleet.net

SAFE  FLEET  
Driving Safety Forward™